

READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE INSTALLING FIXTURE
This fixture is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding.

Retain these instructions for maintenance reference.

INSTRUCTION SHEET NO.

IS:4910

1094 PAGE 1 OF 2

INSTRUCTIONS FOR INSTALLATION

A. FOR OCTAGONAL OUTLET BOX MOUNTING.


1. Loosen and remove BATTERY NUT that secures MOUNTING PLATE to FIXTURE BODY. Remove MOUNTING PLATE from FIXTURE BODY.
2. Screw COVER PLATE to the backside of MOUNTING PLATE with SCREWS provided.
3. Pull supply wires from OUTLET BOX through WIREWAY HOLE in MOUNTING PLATE.
4. Using outlet box screws (provided with outlet box) secure MOUNTING PLATE to outlet box using appropriate slots in MOUNTING PLATE.

B. FOR VERTICALLY MOUNTED RECTANGULAR GEM OR SWITCH BOXES.

1. Loosen and remove BATTERY NUT that secures MOUNTING PLATE to FIXTURE BODY. Remove MOUNTING PLATE from FIXTURE BODY. Pull supply wires from outlet box through the WIREWAY HOLE in MOUNTING PLATE.
2. Using OUTLET BOX SCREWS (provided with outlet box) secure the MOUNTING PLATE to OUTLET BOX using the two horizontal slots.

C. INSTALLATION OF FIXTURE BODY.

1. While supporting fixture, make connections. Black fixture lead or fixture lead without tracer marks to black (hot) supply lead white fixture lead or fixture lead with tracer marks to white (neutral) supply lead. Uninsulated fixture wires are ground wires and all must be connected to grounding terminal or wire in outlet box. Use wirenuts (local hardware item).

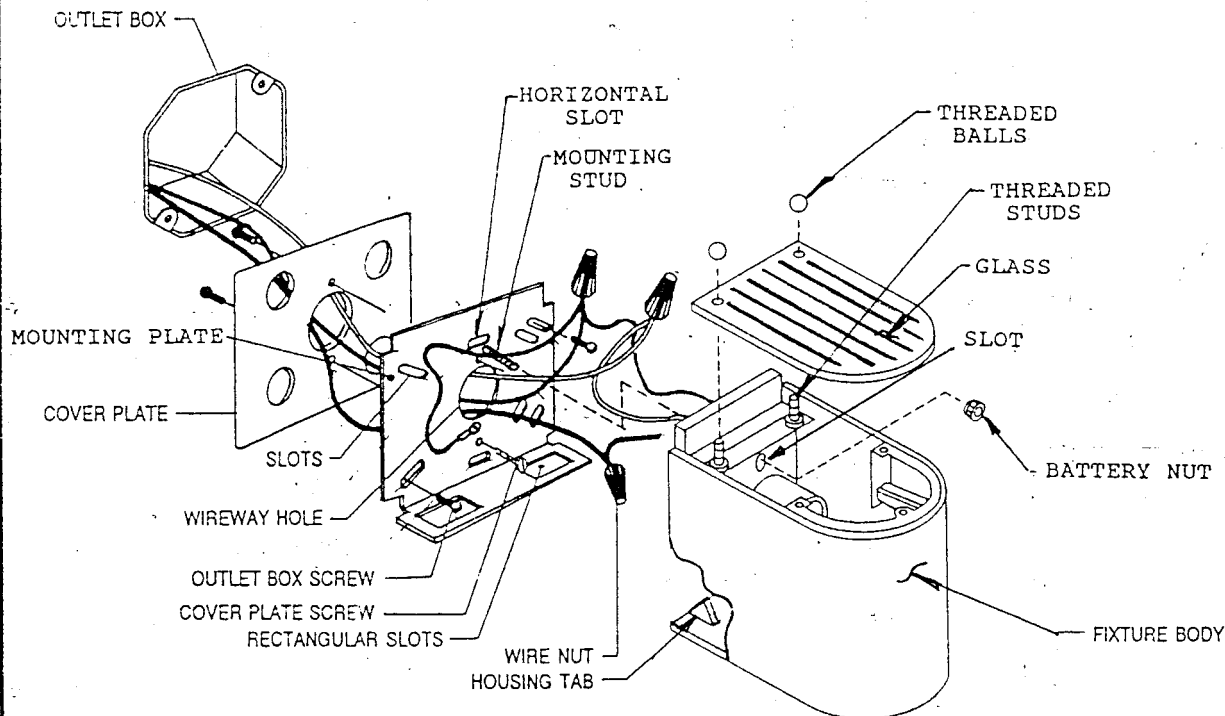

READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE INSTALLING FIXTURE
This fixture is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding.
Retain these instructions for maintenance reference.

INSTRUCTION SHEET NO.

IS:4910

1094 PAGE 2 OF 21

NOTE: For supply connections use wire rated for at least 75° C.

WARNING-RISK OF FIRE. Most dwellings built before 1985 have supply wire rated 60° C. Consult a qualified electrician before installation.

CAUTION: Push supply wires and wirenut connections back into j-box

2. Mount FIXTURE BODY to MOUNTING PLATE by aligning HOUSING TABS up through RECTANGULAR SLOTS in MOUNTING PLATE.

CAUTION: Make certain that no wires are pinched between mounting plate and fixture body.

3. Gently push fixture body against wall until MOUNTING STUD comes through SLOT in FIXTURE BODY. Secure in place using battery nut
4. Install recommended lamp.

CAUTION: Maximum wattage marked on fixture must not be exceeded.

5. Install GLASS over two THEADED STUDS WITH etched pattern on glass facing down, tighten two THEADED BALLS onto THEADED STUDS to secure glass. Do not overtighten!

Note: glass should be removed for cleaning as undue downward pressure on front portion could cause glass support bracket to bend.